




# METROMAX iQ™ ACCESSORIES

## Stainless Steel Drop-in Racks

- Open wire design to safely dry pots, pans, and containers
- To create a storage level with stainless drop-in order the following
  - Qty. 1 Drop-in rack
  - Qty. 1 4-sided MetroMax i™ frame
  - Qty. 1 MetroMax i™ center beam
- Can be retrofitted to existing MetroMax i™ shelves. Simply remove the mats and drop in the stainless drying rack.
- Center beams: RPMX36-CBEAM, RPMX48-CBEAM, RPMX60-CBEAM

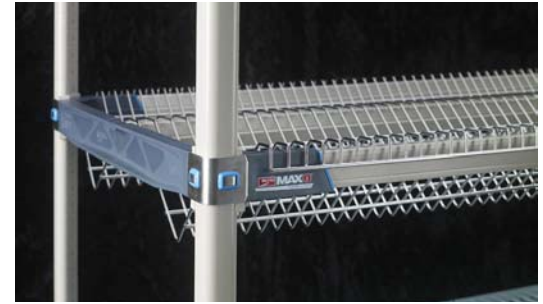


i and Q Model No.	Width (in.) (mm)		Length (in.) (mm)		Height (in.) (mm)		Wire Spacing (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
	DR36S	24	610	33 <sup>7</sup> / <sub>8</sub>	860	5 <sup>1</sup> / <sub>4</sub>	133	<sup>3</sup> / <sub>4</sub>	19	9
DR48S	24	610	45 <sup>7</sup> / <sub>8</sub>	1165	5 <sup>1</sup> / <sub>4</sub>	133	<sup>3</sup> / <sub>4</sub>	19	12	5.4
DR60S	24	610	57 <sup>7</sup> / <sub>8</sub>	1470	5 <sup>1</sup> / <sub>4</sub>	133	<sup>3</sup> / <sub>4</sub>	19	9	6.8

## Cutting Board and Tray Drying Rack System

- Rack is mounted to standard MetroMax i™ or MetroMax Q shelf.
- Promotes safe air drying of cutting boards and trays.
- 1<sup>1</sup>/<sub>8</sub>" (28mm) and 3" (76mm) slide spacing available.

i and Q Model No.	Fits Shelf (in.) (mm)		Upright Spacing (in.) (mm)		Upright Height (in.) (mm)		Tray Capacity	Approx. Pkd. Wt. (lbs.) (kg)	
	TR2436XE	24x36	457x914	1 <sup>1</sup> / <sub>8</sub>	28	6		150	34
TR2448XE	24x48	457x1219	1 <sup>1</sup> / <sub>8</sub>	28	6	150	34	18.0	8.2
TR2460XE	24x60	457x1524	1 <sup>1</sup> / <sub>8</sub>	28	6	150	34	22.5	10.2
TR2436XEA	24x36	457x914	3	76	6	150	14	9.8	4.4
TR2448XEA	24x48	457x1219	3	76	6	150	14	13	5.9
TR2460XEA	24x60	457x1524	3	76	6	150	14	16.3	7.4

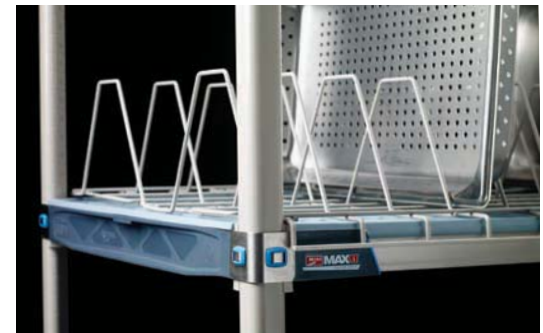

## Can Rack System

- Front loading, front dispensing can rack holds eight #10 cans or twelve #5 cans.
- Tough, corrosion resistant taupe epoxy finish.
- Mounts on any MetroMax i™ or MetroMax Q shelf.

i and Q Model No.	Width/Length/Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)
CR24E	7 <sup>7</sup> / <sub>8</sub> x25 <sup>5</sup> / <sub>16</sub> x15	200x643x381 10 4.5



## 3-Sided frames

- 1" (25mm) x 1<sup>1</sup>/<sub>2</sub>" (38mm) structural steel tubing. Includes tri-lobal adapters to attach to posts. (Replacement adapters: Model No. MTLA bag of 4)
- Corrosion resistant taupe epoxy finish.
- Use when configuring work tables or as a 3-sided ledge to contain bulky items.

i and Q Model No.	Nominal Width (in.) (mm)		Nominal Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	
M3TF1824E	18	457	24	406	11	5
M3TF1830E	18	457	30	760	12	5.4
M3TF1836E	18	457	36	914	13	5.7
M3TF1848E	18	457	48	1220	15	6.6
M3TF1860E	18	457	60	1524	18	8.2
M3TF2424E	24	610	24	406	12	5.4
M3TF2430E	24	610	30	760	13	5.7
M3TF2436E	24	610	36	914	14	6.4
M3TF2448E	24	610	48	1220	18	8.2
M3TF2460E	24	610	60	1524	20	9.1

